

## **Half Moon Bay Airport**


Half Moon Bay, California, United States

Noise Sensitivity



### Diagram #1: Half Moon Bay Noise Abatement Handout - Front

All Aircraft Categories / All Runways

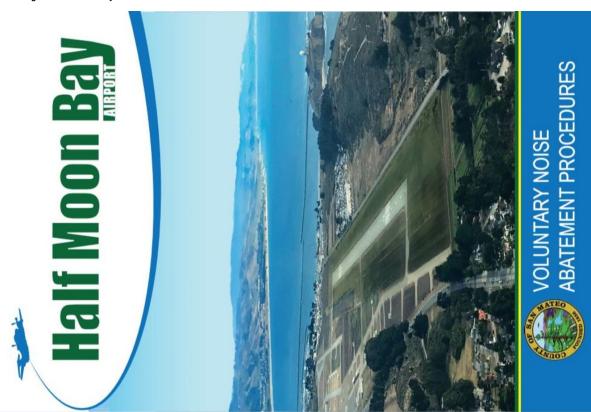

# → Right Traffic for Runway 30, and Left Traffic for Runway 12.


aircraft's quietest departure techniques and following the guidelines and procedures

below, we can reduce the noise impact on our neighbors.

Half Moon Bay Airport is surrounded by noise sensitive areas. By using your

Half Moon Bay Noise Abatement Procedures

- → Reduce power/RPM as soon as safe and practical.
  - Begin crosswind turn (below TPA) as soon as safe.
    - → No stop-and-go's or intersection takeoffs.
- Maintain pattern altitude (1,000' MSL) until necessary to descend for landing
- outbound until clear of the traffic pattern and make a normal 45° entry into → Arrival from the west, fly overhead the airport at 1,500′ MSL; continue the downwind leg at 1,000' MSL
- Pattern work, especially touch-and-go's, is discouraged at night and on weekend and holiday mornings.
- Use caution for aerobatic activity southwest of the airport over the water
  - Unexpected turbulent conditions may be encountered while on final between 1,500' MSL and 4,000' MSL approach to Runway 12.
    - located just north of the airport → Avoid flying over the hospital
- Avoid flying over homes whenever possible.
  - → Aircraft over 12,500 lbs. prohibited

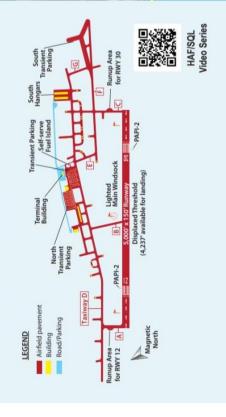



# Half Moon Bay Airport Half Moon Bay, California, United States

Noise Sensitivity Level:



### Diagram #2: Half Moon Bay Noise Abatement Handout - Back

All Aircraft Categories / All Runways





### Half Moon Bay Airport Half Moon Bay, California, United States

Noise Sensitivity Level:



### OVERVIEW

Half Moon Bay Airport is surrounded by many noise sensitive areas. By using your aircraft's quietest departure techniques and following the guidelines below, we can reduce the noise impacts on our neighbors.

### MANDATORY RESTRICTIONS

All Aircraft Categories / All Runways Right traffic Runway 30.

Left traffic Runway 12.

Aircarft over 12,500lbs. prohibited without prior approval of the Airport Manager.

National Marine Santuary restrictions regarding low level overflights are in effect. Please reference aeronautical charts for more information.

### CURFEWS

### All Aircraft Categories / All Runways

Pattern work, especially touch-and-gos are discouraged on weekend and holiday mornings.

### ARRIVALS

### All Aircraft Categories / All Runways

Avoid straight in arrivals unless on an instrument approach.

Maintain pattern altitude until necessary to descend for landing.

Arrivals from the west fly overhead the airport at or above 1,500 MSL; continue outbound until clear of the traffic pattern and make a 45 degree entry into the downwind leg at 1,000 MSL.

### DEPARTURES

All Aircraft Categories / All Runways No turns until reaching 500' MSL

### PREFERENTIAL RUNWAYS

### **All Aircraft Categories**

Please use runway 12 when wind permits.

### PATTERN ALTITUDES

ALL VALUES ARE MSL (FEET)

All Aircraft Categories / All Runways 1,000 MSL

### INTERSECTION TAKEOFFS

All Aircraft Categories / All Runways

No intersection takeoffs.

### FLIGHT TRAINING

No stop-and-goes.

Pattern work, especially touch-and-goes, is discouraged at night and on weekend and holiday mornings.

### STAGE II

Aircarft over 12,500lbs. prohibited without prior approval of the Airport Manager.

### STAGE III

Aircarft over 12,500lbs. prohibited without prior approval of the Airport Manager.





### Half Moon Bay Airport Half Moon Bay, California, United States

Noise Sensitivity Level:



### PRIOR PERMISSION (PPR) OPERATIONS

Aircarft over 12,500 lbs. prohibited without prior approval of the Airport Manager.

### **NBAA PROCEDURE**

Our airport recommends use of NBAA procedures, please see the appendix.

### AOPA NOISE AWARENESS STEPS

Our airport recommends use of AOPA procedures, please see the appendix.

### AIRPORT CONTACT INFORMATION

Name Gretchen Kelly
Title Airport Manager
Noise Hotline 650-728-1203
Phone 650-573-3701

Fax 650-728-2014 Email airports@smcgov.org

Web Address https://publicworks.smcgov.org/airports

### ABOUT AIRCRAFT CATEGORIES

Α	В	С	D	E	HELI
< 91 kts	91-120 kts	121-140 kts	141-165 kts	>165 kts	Helicopters

Aircraft Approach Categories are based on FAA reference speeds. See http://whispertrack.com/pdf/faa\_handbook.pdf

**Half Moon Bay Airport** 

9850 Cabrillo Hwy North

Half Moon Bay CA 94019

 $V_{REF} = 1.3 \times V_{SO}$ 

TEMPORARY INFORMATION (NONE)

PREFERENTIAL INSTRUMENT PROCEDURES (NONE)

REVERSE THRUST (NO RESTRICTIONS)

APU USE (NO RESTRICTIONS)

ENGINE RUNUP (NO RESTRICTIONS)

COMMUNITY GROUPS/INFO (NONE)

FLIGHT TRACK MONITORING (NONE

NOISE ORDINANCE (NONE)

NOISE MONITORING (NONE)





# **Half Moon Bay Airport**

Half Moon Bay, California, United States

Noise Sensitivity



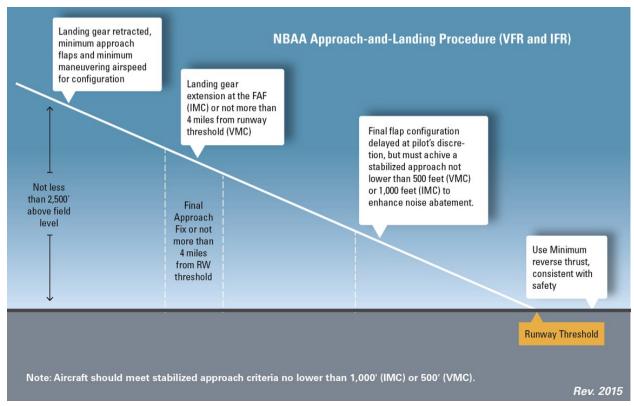

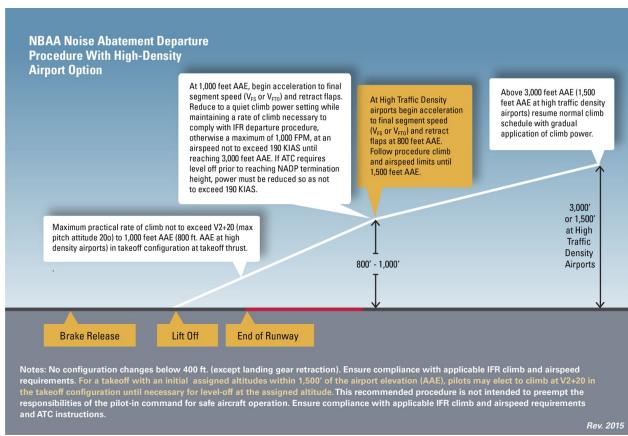





### **AOPA Noise Awareness Steps**

Following are some general guidelines and techniques to minimize the noise impact produced by aircraft operating near the ground.

- 1. If practical, avoid noise-sensitive areas such as residential areas, open-air assemblies (e.g. sporting events and concerts), and national park areas. Make every effort to fly at or above 2,000 feet over the surface of such areas when overflight cannot be avoided.
- 2. Consider using a reduced power setting if flight must be low because of cloud cover or overlying controlled airspace or when approaching the airport of destination. Propellers generate more noise than engines; flying with the lowest practical rpm setting will reduce the aircraft's noise level substantially.
- 3. Perform stalls, spins, and other practice maneuvers over uninhabited terrain.
- 4. Many airports have established specific noise abatement procedures. Familiarize yourself and comply with these procedures.
- 5. To contain aircraft noise within airport boundaries, avoid performing engine runups at the ends of runways near housing developments. Instead, select a location for engine runup closer to the center of the field.
- 6. On takeoff, gain altitude as quickly as possible without compromising safety. Begin takeoffs at the start of a runway, not at an intersection.
- 7. Retract the landing gear either as soon as a landing straight ahead on the runway can no longer be accomplished or as soon as the aircraft achieves a positive rate of climb. If practical, maintain best-angle-of-climb airspeed until reaching 50 feet or an altitude that provides clearance from terrain or obstacles. Then accelerate to best-rate-of-climb airspeed. If consistent with safety, make the first power reduction at 500 feet.
- 8. Fly a tight landing pattern to keep noise as close to the airport as possible. Practice descent to the runway at low power settings and with as few power changes as possible.
- 9. If a VASI or other visual approach guidance system is available, use it. These devices will indicate a safe glidepath and allow a smooth, quiet descent to the runway.
- 10. If possible, do not adjust the propeller control for flat pitch on the downwind leg; instead, wait until short final. This practice not only provides a quieter approach, but also reduces stress on the engine and propeller governor.
- 11. Avoid low-level, high-power approaches, which not only create high noise impacts, but also limit options in the event of engine failure.
- 12. Flying between 11 p.m. and 7 a.m. should be avoided whenever possible. (Most aircraft noise complaints are registered by residents whose sleep has been disturbed by noisy, low-flying aircraft.)

Note: These recommendations are general in nature; some may not be advisable for every aircraft in every situation. No noise reduction procedure should be allowed to compromise safety.

